

Specifications

MODELS	GS™-2032		GS™-2632	
MEASUREMENTS	Metric	US	Metric	US
Working height max*	7.9 m	26 ft	9.7 m	32 ft
A Platform height max	6.1 m	20 ft	7.90 m	26 ft
B Platform length - outside	2.26 m	89 in	2.26 m	89 in
extended	3.25 m	128 in	3.25 m	128 in
C Platform width - outside	79 cm	31 in	79 cm	31 in
Guardrail height: CE	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in
Roll-out platform extension	91 cm	3 ft	91 cm	3 ft
Toeboard height	15 cm	6 in	15 cm	6 in
Height - stowed: platform	98 cm	38.5 in	1.17 m	46 in
D solid rails-CE	2.11 m	83 in	—	—
folding guardrails	2.11 m	83 in	2.29 m	90 in
rails folded	1.73 m	68 in	1.73 m	68 in
E Length - stowed	2.44 m	96 in	2.44 m	96 in
Length - extended	3.31 m	10 ft 11 in	3.31 m	10 ft 11 in
F Width	81 cm	32 in	81.3 cm	32 in
G Wheelbase	1.85 m	73 in	1.85 m	73 in
H Ground clearance - centre	10.2 cm	4 in	10.2 cm	4 in
I with pothole guards deployed	2 cm	7/8 in	2 cm	7/8 in

PRODUCTIVITY

Lift capacity	363 kg	800 lbs	227 kg	500 lbs
Drive speed - stowed	3.74 km/h	2.2 mph	3.74 km/h	2.2 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability	30%		25%	
Turning radius - inside	zero	zero	na	na
Turning radius - outside	2.34 m	92 in	2.34 m	92 in
Raise / lower speed	30 / 26 sec	30 / 26 sec	37 / 24 sec	37 / 24 sec
Controls	24V DC proportional		24V DC proportional	
Drive	dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel	
Tyres - solid rubber	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13	15 x 5 in

POWER




Power source	24V (4 6V 225 AH batteries)	24V (4 6V 225 AH batteries)
Hydraulic system capacity	28.4 L	7.5 gal
	20.8 L	5.5 gal

WEIGHT***

CE, AUS	1,825 kg	4,024 lbs	2,504 kg	5,520 lbs
---------	----------	-----------	----------	-----------

STANDARDS COMPLIANCE

CE EN280
AS 1418•10

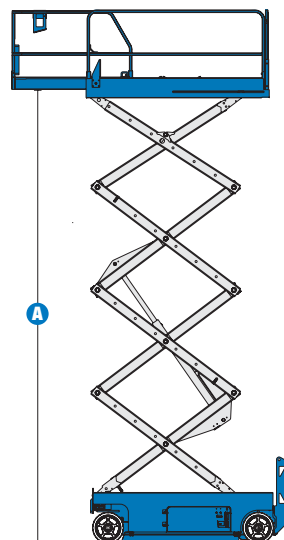

*The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Weight will vary depending on options and/or country standards.

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

PLATFORM OPTIONS

- 1.62 m (5 ft 4 in) steel platform (standard - GS™-2032)
- 2.25 m (7 ft 5 in) steel platform (standard - GS™-2632)
- 91 cm (3 ft) extension platform
- Solid rails (GS-2032)

POWER

- 24V (4 6V 225 AH batteries)

DRIVE

- 2WD

TYRE

- Solid non-marking tyres

STANDARD FEATURES

MEASUREMENTS

GS™-2032

- 7.9 m (26 ft) working height
- Up to 363 kg (800 lb) lift capacity

GS™-2632

- 9.7 m (32 ft) working height
- Up to 227 kg (500 lb) lift capacity

PRODUCTIVITY

- Proportional controls for lift and drive functions
- Automatic 25 amp battery charger
- Manual platform lowering valve
- Emergency stop switches at both platform and ground controls
- Drive speed interlock limits speed while elevated
- Multiple disc brakes provide smooth deceleration
- Manual brake release
- Pothole guards
- Non-marking tyres
- AC wiring to platform
- Tilt sensor with an audible alarm
- Beeper horn
- Hour meter
- Platform swing gate
- Dual flashing beacon
- Automatic battery charger



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Air line to platform
- Platform work lights
- Automotive horn
- Dual flashing beacons
- Ground controls cover
- Motion alarm

Genie Australia

591 Boundary Road, Darra, Qld 4076
PO Box 394, Richlands, Qld 4077
Tel: + 61 7 3375 1660
Toll Free In Australia: 1800 331 660
Fax: + 61 7 3375 1002

European Offices

UK

The Maltings
Wharf Road
Grantham NG31 6BH
UK
Tel: +44 (0)1476 584333
Fax: +44 (0)1476 584334

France

10, ZA de la Croix St. Mathieu
28320 Gallardon
France
Tel: +33 (0)2 37 26 09 99
Fax: +33 (0)2 37 26 09 98

Germany

Finienweg 3
28832 Achim/Bremen
Germany
Tel: +49 (0)4202 8852-0
Fax: +49 (0)4202 8852-25

Spain

Gai'a 31, Pol. Ind. Pl'a d'en Coll
08110 Montcada i Reixac
Barcelona
Spain
Tel: +34 93 572 50 90
Fax: +34 93 572 50 91

Scandinavia

Tagenevägen 72
425 37 Hisings Kärra
Sweden
Tel: +46 31 57 51 00
Fax: +46 31 57 90 20

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
USA
Tel: +1 425 881-1800
Fax: +1 425 883-3475

WEB: www.genieindustries.com.au

Distributed By: