MHP13AT/14AT

TRAILER MOUNTED BOOM LIFTS



- Safe and stable working height of up to 13.5m
- Heavy duty trailer mounted articulated boom lift
- Robust steel platform with two man capacity
- Easy to use outrigger/boom safety interlocks
- Ideal for a wide range of applications



TRAILER MOUNTED BOOM LIFTS

MHP13AT/14AT


DIMENSIONS	MHP13AT	MHP14AT
Max. working height	12.9m	13.5m
Max. platform height (A)	10.9m	11.5m
Horizontal outreach	6.4m	6.4m
Platform size	1.25m x 0.78m x 1.07m	1.25m x 0.78m x 1.07m
Overall width (outriggers extended)	3.6m	3.6m
Overall width (outriggers retracted) (B)	1.6m	1.6m
Overall length (C)	4.9m	4.9m
Transport height (D)	2m	2m


PERFORMANCE		
Platform capacity	215kg	215kg
Max. wind speed	12.5m/sec	12.5m/sec
Platform Levelling	Hydraulic	Hydraulic
Turntable rotation	540° non-continuous	540° non-continuous
Tyres	185 R14 102/100P	185 R14 102/100P
Brakes	Hydrau	ılic disc
Trailer tongue weight	80kg	80kg

POWER		
Power source	Honda petrol	Honda petrol

WEIGHT		
Gross weight	1,460kg	1,460kg

WORKING ENVELOPE

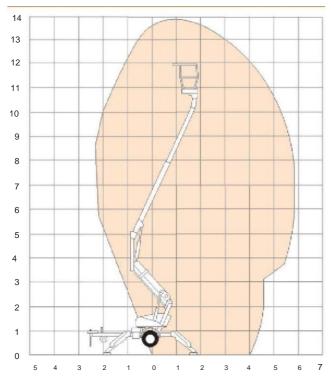



STANDARD FEATURES

- Heavy duty tow coupling
- Hydraulic stabilisers
- Solid platform
- Two person capacity
- Heavy duty jockey wheel
- Hydraulic disc brakes
- Reliable petrol engine
- Outrigger/boom safety interlocks
- LED taillights
- Hydraulic rotator
- Lifting lugs
- Platform foot switch
- Automatic self levelling stabilisers
- Spare wheel

OPTIONS

- Custom colours
- Platform work lights
- Air line to platform
- Flashing light
- Height lockout (MHP14AT only)
- 240V 110V outlet in platform
- Battery isolate switch
- Diesel, electric and bi-energy options



2/26 Redfern Street, Wetherill Park, NSW 2164, Australia t: +61 1300 900 700

e: sales.au@snorkellifts.com