

MHP15HD

TRAILER MOUNTED BOOM LIFT



- Working height of up to 14.8m
- Heavy duty trailer mounted articulated boom lift
- Superb and efficient engine for a smooth and accurate response
- Easy to use outrigger/boom safety interlocks
- Ideal for a wide range of applications

snorkel
www.snorkellifts.com

TRAILER MOUNTED BOOM LIFTS

MHP15HD



DIMENSIONS		MHP15HD
Max. working height		14.8m
Max. platform height (A)		12.8m
Horizontal outreach		7m at 8m
Platform size		1.24m x 0.77m x 1.1m
Outrigger footprint		4.4m x 3.6m
Overall width (outriggers extended)		3.7m
Overall width (outriggers retracted) (B)		1.77m
Overall length (C)		7.45m
Transport height (D)		1.9m

PERFORMANCE	
Platform capacity	200kg
Max. wind speed	12.5m/sec
Max. Towing speed	80km/h
Platform Levelling	Mechanical
Turntable rotation	540° non-continuous
Tyres	235/75 R15
Brakes	Hydraulic disc
Max. axle capacity	2,000kg
Trailer tongue weight	90kg

POWER	
Power source	Honda petrol engine 5.5Hp
Hydraulic system	Proportional electro/hydraulic

WEIGHT	
Gross weight	1,760kg

WORKING ENVELOPE

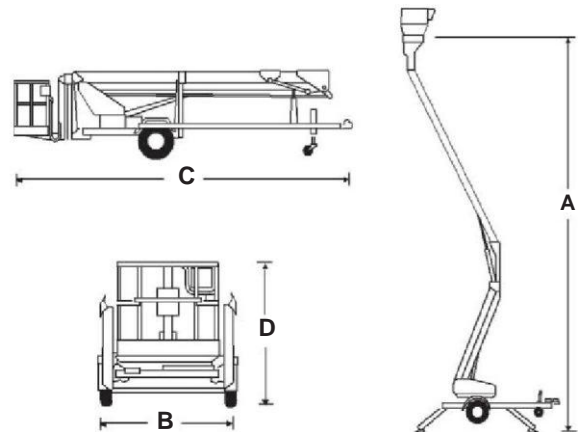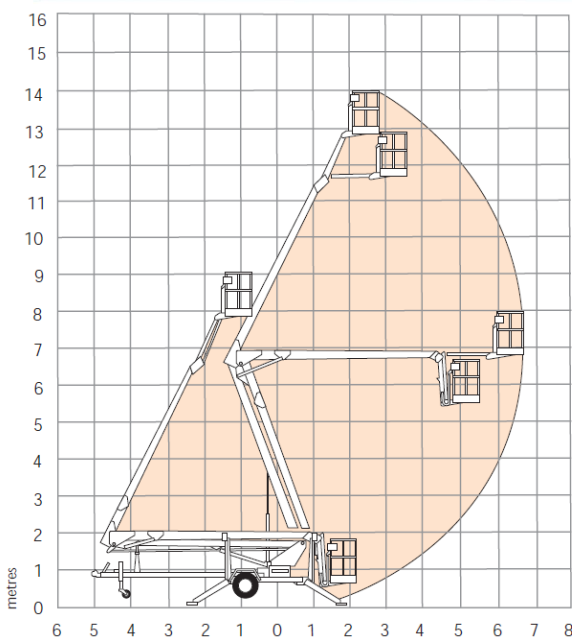

STANDARD FEATURES

- Spare wheel
- Two man steel platform
- Heavy duty tow coupling
- Heavy duty jockey wheel
- Hydraulic disc brakes
- Reliable petrol engine
- Lifting lugs
- Hour meter
- Hydraulic outriggers
- Platform rotator
- Automatic self levelling stabilisers

OPTIONS

- 360° continuous rotation turntable
- Flashing light
- 110/240V AC GFCO power to platform
- 10.9m cut out switch
- Alternative power options
- LV Insulation

snorkel www.snorkellifts.com

2/26 Redfern Street,
Wetherill Park,
NSW 2164, Australia
t: +61 1300 900 700
e: sales.au@snorkellifts.com

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance

