# T40RT/T46JRT

### TELESCOPIC BOOM LIFT



- Mid-size diesel telescopic boom lifts
- Available with and without a jib boom
- Oscillating axle and 4 wheel drive for excellent rough terrain performance
- Simple to operate and maintain
- Ideal for construction and industrial applications



### TELESCOPIC BOOM LIFT


DIMENSIONS	T40RT	T46JRT
Max. working height	14.2m	16.0m
Max. platform height (A)	12.2m	14.0m
Max. working outreach	10.1m	12.2m
Platform size	2.44m x 1.0m	2.44m x 1.0m
Overall width (B)	2.44m	2.44m
Stowed length (C)	7.57m	8.6m
Stowed height ( <b>D</b> )	2.4m	2.4m
Wheelbase	2.44m	2.44m
Ground clearance	360mm	360mm

PERFORMANCE		
Platform capacity	272kg	227kg
Max. drive height	12.2m	14.0m
Max. drive speed (stowed)	7.25km/h	7.25km/h
Max. drive speed (elevated)	1.1km/h	1.1km/h
Jib length	n/a	1.8m
Jib arc	n/a	136°
Raise/lower time	64/64 sec	64/64 sec
Gradeability	45%	40%
Inside turning radius	1.37m	1.37m
Outside turning radius	4.57m	4.57m
Tyres	355/55 D625 high grip, poly-filled	
Controls	proportional drive, raise and slew	
Drive system	4 wheel drive with oscillating axle	


POWER			
Power source	Kubota V150	Kubota V1505T diesel 44.2Hp	
Auxillary power unit	12V DC	12V DC	

WEIGHT		
Gross weight	6,486kg	7,030kg

#### WORKING ENVELOPE

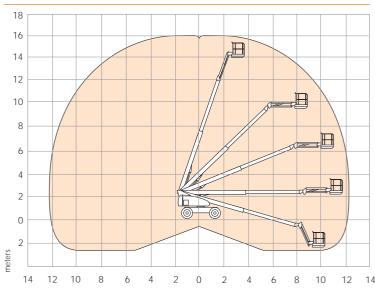

## T40RT/T46JRT



#### STANDARD FEATURES

- 4 wheel drive
- Oscillating axle
- Swing-out engine tray
- Tilt alarm and cut-out
- Horn
- Power line to platform (no sockets)
- Hour meter
- DC emergency operation
- Three entry cage
- Flashing amber beacon
- CE approved

#### **OPTIONS**

- Special paint colours
- 1.82m x 0.99m cage
- Platform work lights
- Hydraulic generator
- Compressed airline to platform
- Steel cowling covers
- Cold weather package
- Extreme cold weather package
- 12k generator package
- 12k generator/welder package



2/26 Redfern Street, Wetherill Park, NSW 2164, Australia t: +61 1300 900 700 e: sales.au@snorkellifts.com