
UL Series

PUSH AROUND MAST LIFTS



- Robust push-around mast lifts
- Patented Girder Lock mast design for stable working up to 14.4m
- Compact dimensions
- Passes through a standard doorway
- Easy loader system for flatbed vehicle transport

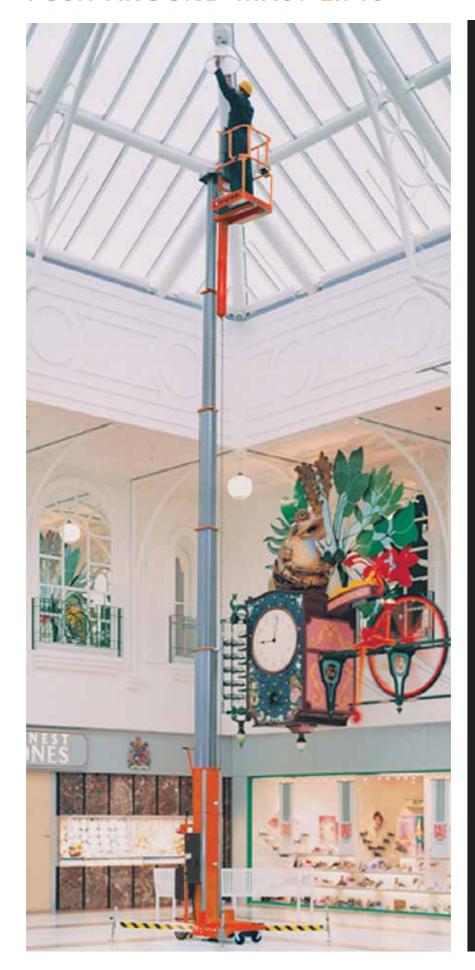

PUSH AROUND MAST LIFTS


DIMENSIONS	UL25	UL32	UL40
Max. working height	9.6m	11.7m	14.4m
Max. platform height (A)	7.6m	9.7m	12.4m
Platform length	0.56m	0.56m	0.56m
Platform width	0.66m	0.66m	0.66m
Outrigger footprint (B x C)	2.06m x 1.99m	2.06m x 1.99m	2.34m x 2.26m
Overall width (F)	0.74m	0.74m	0.74m
Overall length (D)	1.26m	1.32m	1.32m
Stowed height (E)	1.99m	2.53m	2.90m
Tilt back height (G)	1.94m	1.94m	2.0m
Tilt back length (H)	2.6m	2.66m	2.99m

PERFORMANCE			
Platform capacity (SWL)	159kg	136kg	136kg
Max operating wind speed	0m/s	0m/s	0m/s
Raise/lower time	43/23 seconds	57/26 seconds	60/40 seconds
Wheels	250mm x 64mm rear, 150mm castors front		
Controls		push button	
Wall access (Distance from front of platform to v	356mm	356mm	748mm


POWER	
Power source (AC)	120/220V AC 50HZ
Power source (DC)	1 X 12V 105Ah battery

WEIGHT			
Gross weight (AC)	390kg	435kg	470kg
Gross weight (DC)	420kg	465kg	500kg

OUTRIGGER FOOTPRINT



UL Series



STANDARD FEATURES

- Tilt-back mechanism
- Outrigger interlock indicators
- Power cable to platform (no sockets)
- Integrated battery charger (DC only)
- Non-marking wheels & castors
- CE approved

OPTIONS

- Special paint colours
- Tool tray
- Canvas bag for fluorescent tubes
- Laser locator
- Environmental green oil

Ssnorkel

2/26 Redfern Street, Wetherill Park, NSW 2164, Australia t: +61 1300 900 700

e: sales.au@snorkellifts.com