


Specifications

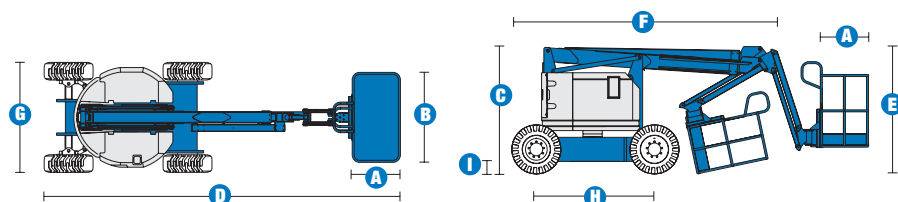

MODELS Z™-34/22 IC 4WD		
MEASUREMENTS	Metric	US
Working height	12.4 m	40 ft 8 in
Platform height	10.6 m	34 ft 8 in
Horizontal reach	6.8 m	22 ft 4 in
Up and over clearance - at platform	4.6 m	15 ft
A Platform length	76 cm	30 in
B Platform width	1.42 m	56 in
C Height - stowed	2 m	6 ft 8 in
D Length - stowed	5.7 m	18 ft 7 in
E Storage height	2.26 m	7 ft 6 in
F Storage length	4.1 m	13 ft 6 in
G Width	1.78 m	5 ft 10 in
H Wheelbase	1.88 m	6 ft 2 in
I Ground clearance	17 cm	6 1/2 in


PRODUCTIVITY		
Lift capacity	227 kg	500 lbs
Platform rotation	160	160°
Vertical jib rotation	144°	144°
Turntable rotation	355°	355°
Turntable tailswing	zero	zero
Drive speed - stowed	0-7.2 km/h	0- 4.5 mph
Drive speed - raised or extended	1.1 km/h	0.6 mph
Gradeability*	45%	45%
Turning radius - inside	1.73 m	5 ft 8 in
Turning radius - outside	4 m	13 ft 1 in
Controls	proportional	proportional
Tyres	10-16.5 rough terrain	10-16.5 rough terrain

POWER		
Power source	Kubota Diesel 19.4 kw Kubota Diesel 19.4 kw (26 hp) (26 hp)	
Hydraulic tank capacity	68 L	18 gal
Fuel tank capacity	44 L	11.5 gal

WEIGHT		
Weight	4,854 kg	10,500 lb

STANDARDS COMPLIANCE		
	ANSI/SIA A92.5 CSA/CAN3-B354.4-M82 CE compliance option AS 1418.10	

RANGE OF MOTION Z™-34/22 IC

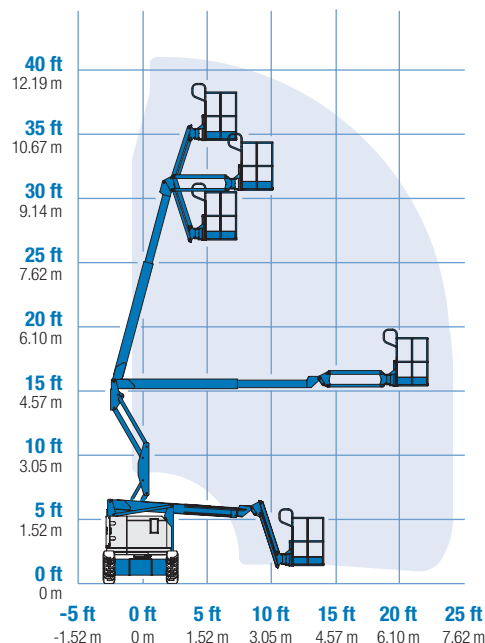

*Stowed position only

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

PLATFORM

- Steel 1.22 m (4 ft)
- 1.22 m (4 ft) jib boom

POWER


- Kubota Diesel 19.4 kw Kubota Diesel 19.4 kw (26 hp) (26 hp)

DRIVE

- 4WD

TYRES

- Foam-filled tyres

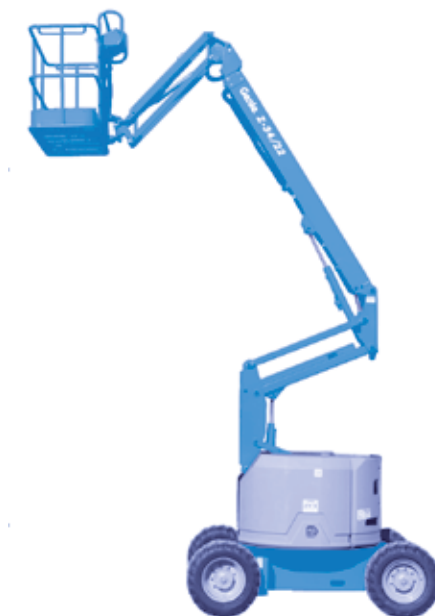

STANDARD FEATURES

MEASUREMENTS

Z™-34/22 IC 4WD

- 12.4 m (40 ft 8 in) working height
- 6.8 m (22 ft 4 in) horizontal reach
- 4.6 m (15 ft) up and over clearance
- Up to 227 kg (500 lb) lift capacity

PRODUCTIVITY

- Compact 1.78 m wide (70 in) 4x4 model
- 500 lb (227 kg) platform capacity
- 1.22 m (4 ft) jib features 144° working range
- Dual wheel spring-applied brakes
- Fully proportional controls
- 160° powered platform rotation
- Auxiliary power unit
- Self-levelling platform
- Water, oil and voltage gauges
- Hour meter

POWER

- Kubota Diesel 19.4 kw Kubota Diesel 19.4 kw (26 hp) (26 hp)

OPTIONS & ACCESSORIES

PRODUCTIVITY

- Alarm package
- Cold start packages
- Platform-mounted work light
- 1.22 m (4 ft) platform
- Air line to platform
- Platform swing gate

Genie Australia

591 Boundary Road, Darra, Qld 4076
PO Box 394, Richlands, Qld 4077
Tel: + 61 7 3375 1660
Toll Free In Australia: 1800 331 660
Fax: + 61 7 3375 1002

European Offices

UK

The Maltings
Wharf Road
Grantham NG31 6BH
UK
Tel: +44 (0)1476 584333
Fax: +44 (0)1476 584334

France

10, ZA de la Croix St. Mathieu
28320 Gallardon
France
Tel: +33 (0)2 37 26 09 99
Fax: +33 (0)2 37 26 09 98

Germany

Finienweg 3
28832 Achim/Bremen
Germany
Tel: +49 (0)4202 8852-0
Fax: +49 (0)4202 8852-25

Spain

Gai'a 31, Pol. Ind. Pl'a d'en Coll
08110 Montcada i Reixac
Barcelona
Spain
Tel: +34 93 572 50 90
Fax: +34 93 572 50 91

Scandinavia

Tagenevägen 72
425 37 Hisings Kärra
Sweden
Tel: +46 31 57 51 00
Fax: +46 31 57 90 20

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
USA
Tel: +1 425 881-1800
Fax: +1 425 883-3475

WEB: www.genieindustries.com.au

Distributed By: