


Specifications

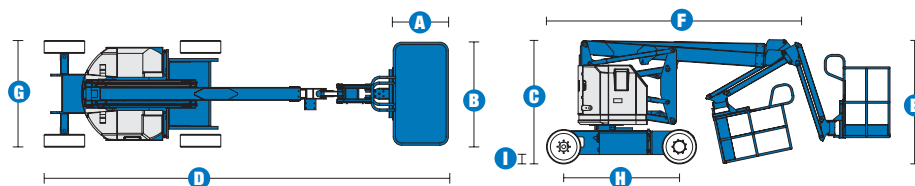

MODEL	Z™-34/22N	
MEASUREMENTS	Metric	Imperial
Working height max**	12.5 m	41 ft
Platform height max	10.5 m	34 ft 4 in
Horizontal reach max	6.8 m	22 ft 4 in
Up and over clearance	4.6 m	15 ft 3 in
A Platform length	76 cm	2 ft 5 in
B Platform width	1.42 m	4 ft 6 in
C Height - stowed	2 m	6 ft 5 in
D Length - stowed	5.7 m	18 ft 7 in
E Storage height	2.26 m	7 ft 5 in
F Storage length	4.2 m	13 ft 7 in
G Width	1.47 m	4 ft 8 in
H Wheelbase	1.88 m	6 ft 2 in
I Ground clearance	15 cm	5.34 in


PRODUCTIVITY		
Lift capacity	227 kg	500 lb
Platform rotation	160°	
Turntable rotation	355° non-continuous	
Tailswing	zero	
Drive speed - stowed	0-5.6 km/h	0-3.5 mph
Drive speed - raised*	0-1 km/h	0-0.6 mph
Gradeability	35%	
Turning radius (inside)	1.83 m	6 ft
Turning radius (outside)	3.9 m	12 ft 8 in
Controls	proportional drive and lift	
Tyres (solid rubber, no-marking)	60 cm x 18 cm x 45 cm	23 x 7 x 17.75 in

POWER		
Power source	8 group - 4H (6V 315 AH batteries)	
Hydraulic tank capacity	19 L	5gal

WEIGHT***		
	5,216 kg	11,500 lbs

STANDARDS COMPLIANCE		
	ANSI/SIA A92.5	
	CSA CAN3-B354.4-M82	
	CE compliance option	
	AS1418.10	

RANGE OF MOTION Z™-34/22N

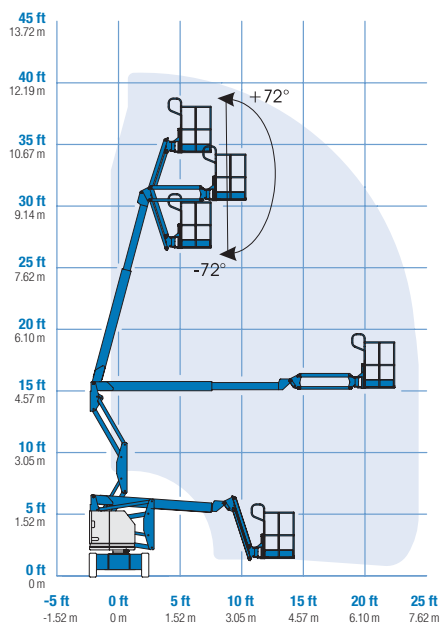

* In lift mode (platform raised), the machine is designed for operation on firm level surfaces only.
 ** The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 *** Weight will vary depending on options and/or country standards.

Features

PLATFORM

- Steel 1.42 m (4 ft 8 in) (standard)

JIB

- 1.22 m (4 ft) jib boom

POWER

- 48 V DC power source

DRIVE

- 2WD

TYRE

- Solid rubber non-marking

STANDARD FEATURES

MEASUREMENTS

- 12.4 m (40 ft 6 in) working height
- 6.8 m (22 ft 4 in) horizontal reach
- Compact 1.47 m (4 ft 8 in) width
- 227 kg (500 lb) lift capacity

PRODUCTIVITY

- 48V DC power source
- Proportional drive and lift
- 160° platform rotation
- Articulating jib features 144° working range
- Drive enable
- AC wiring to platform
- Self-levelling platform
- Hour metre
- Non-marking tyres

POWER

- 8 group - 4H (6V 315 AH batteries)



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Platform swing gate
- Air line to platform
- Alarm package
- Platform work lights
- Lift/drive select
- Battery charge indicator
- Battery charge indicator (BCI)
- LVI (low voltage interrupt) with BCI

Genie Australia

591 Boundary Road, Darra, Qld 4076
PO Box 394, Richlands, Qld 4077
Tel: + 61 7 3375 1660
Toll Free In Australia: 1800 331 660
Fax: + 61 7 3375 1002

European Offices

UK

The Maltings
Wharf Road
Grantham NG31 6BH
UK
Tel: +44 (0)1476 584333
Fax: +44 (0)1476 584334

France

10, ZA de la Croix St. Mathieu
28320 Gallardon
France
Tel: +33 (0)2 37 26 09 99
Fax: +33 (0)2 37 26 09 98

Germany

Finienweg 3
28832 Achim/Bremen
Germany
Tel: +49 (0)4202 8852-0
Fax: +49 (0)4202 8852-25

Spain

Gai'a 31, Pol. Ind. Pl'a d'en Coll
08110 Montcada i Reixac
Barcelona
Spain
Tel: +34 93 572 50 90
Fax: +34 93 572 50 91

Scandinavia

Tagenevägen 72
425 37 Hisings Kärra
Sweden
Tel: +46 31 57 51 00
Fax: +46 31 57 90 20

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
USA
Tel: +1 425 881-1800
Fax: +1 425 883-3475

WEB: www.genieindustries.com

Distributed By: